

# TUBULAR CONTAINER


**Patent number:** JP9226788 (A)  
**Publication date:** 1997-09-02  
**Inventor(s):** KISHI TAKAO; FUJIE TAKASHI  
**Applicant(s):** YOSHINO KOGYOSHO CO LTD  
**Classification:**  
 - **international:** *B65D35/46; B05B11/00; B65D35/50; B65D47/20; B65D35/00; B05B11/00; B65D47/04; (IPC1-7): B65D35/50; B65D35/46*  
 - **european:** B05B11/00P5N; B65D47/20E4A3  
**Application number:** JP19960062138 19960222  
**Priority number(s):** JP19960062138 19960222

**Also published as:**

JP3569378 (B2)

## Abstract of JP 9226788 (A)

**PROBLEM TO BE SOLVED:** To prevent a content from being excessively discharged.  
**SOLUTION:** The lower internal surface of a first fitting wall 7 at the top of a mouth part, is closed with a top plate 9 having a suction valve hole 8, and a U-shaped wall 12 is erected from the top plate part behind a notch 10 which is provided on the front part of the first fitting wall 7, for a container main body 2. This tubular container is equipped with the container main body 2, a discharging valve plate 18 which forms a discharging valve 21 together with the recessed part 11 of the U-shaped wall, and a suction valve plate 20 which forms a suction valve 22 together with the suction valve hole 8.; Then, an elastic valve member 15 for which the second fitting wall 16 is airtightly fitted in the internal surface of the first fitting wall 7, and a cap member 25 which is constituted in such a manner that from the upper end of a third fitting wall 26 being airtightly fitted on the external surface of the first fitting wall 7, an elastically deformable dome-shaped wall 28 is bridged from the inner peripheral edge of an inward flange which is mounted on the second fitting wall 16 and projected, and also, a nozzle 31 is provided on a part of the third fitting wall 26 in front of the notch 10, are provided.

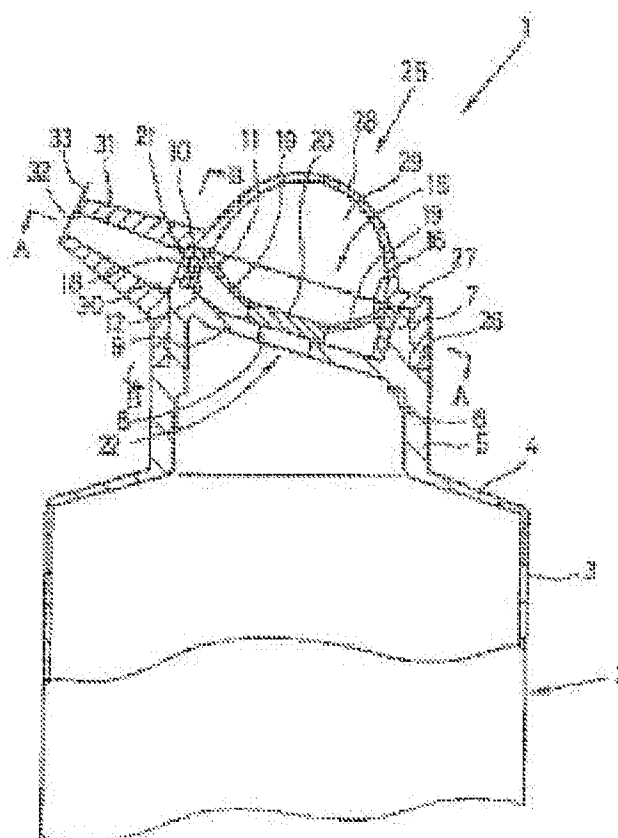

.....  
Data supplied from the **esp@cenet** database — Worldwide